


CEE 7/VII

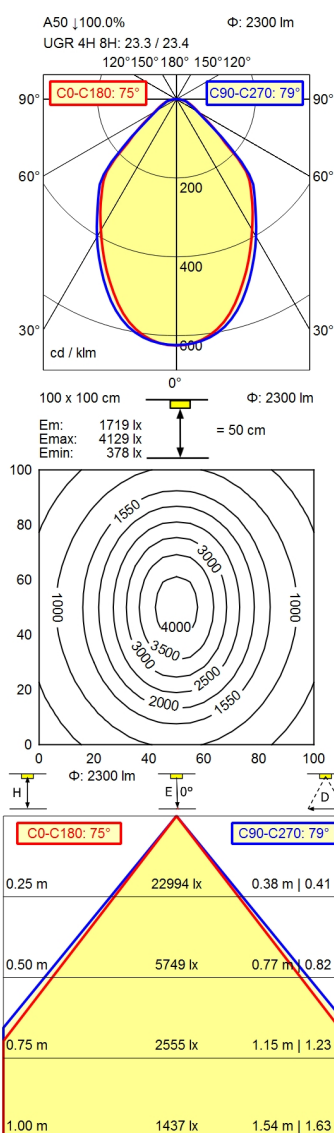

**light source**  
**work equipment**  
**connected load**  
**power consumption**  
**luminous flux**  
**luminous efficiency**  
**light type/-color**  
**colour temperatur**  
**color rendering index**  
**light distribution**  
**direct ratio**  
**beam angle**  
**chromaticity tolerance LED**  
**luminance (L65)**  
**unified glare rating (4H 8H)**  
**system of protection**  
**class of protection**  
**technology**  
**operation**  
**housing**  
**cover**  
**arm**  
**balance of articulation joints**  
**weight (net)**  
**mains lead**  
**fastening**  
**decorative contrast side parts**

LED  
electronic transformer  
100-240 V, 50/60 Hz; secondary 24 V, DC  
env. 30 W  
approx. 2.300 lm  
approx. 88 lm/W  
cold white  
approx. 5.000 K  
CRI > 90; R9 > 50  
direct  
approx. 100 %  
75°  
< 3 SDCM  
<= 12000 cd/m²  
<= 25  
IP 20  
I with plug-in power supply; III without plug-in  
power supply  
Touch DIM  
multi-function switch  
aluminium coloured anodised  
structured; plastic  
silver metallic  
spring  
ca. 2,3 kg  
ca. 3,4 m; mains plug; CEE 7/VII  
table base  
black

Arm-mounted luminaire TANE0  
TND 2100/950/D  
113736000-00809765

